



**TRELLCHEM®**  
THE SAFETY STANDARD

## TRELLCHEM® EVO



Type CV with sewn-in socks/booties and separate boots.

Trellchem® EVO provides maximum protection against hazardous chemicals in liquid, vapor, gaseous and solid form, including warfare agents. Trellchem® EVO is fully certified in accordance with the American standard NFPA 1991, including the optional chemical flash fire and liquefied gas protection requirements.

### GARMENT MATERIAL

The combination of elastomers and plastics with an aramid fabric makes a strong and flexible material that offers an outstanding chemical barrier - more than 24 hours protection against a wide range of chemicals - coupled with an excellent degradation resistance, provided by the outer Viton® layer, flame resistance and antistatic properties. The material fulfills NFPA 1991 without any added protection required.

### COLOR

Red or olive green.

### STANDARDS


- NFPA 1991 (including the optional chemical flash fire and liquefied gas protection requirements)
- EN 943-1 and EN 943-2
- EN 1073-2 (radioactive particles)
- EN 14126 (infective agents)
- Approved for use in explosive environments Zone 0, Group IIC according to ATEX Directive 94/9/EC



Type VP1



Type T

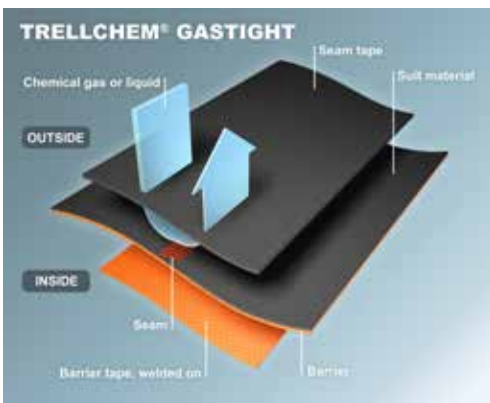

Trellchem® seam

### DESIGN

Trellchem® EVO comes in different designs to fit all user preferences:

- Encapsulating design with hump (type CV or VP1), BA worn inside the suit, or
- Non-encapsulating design with face seal and without hump (type T), BA worn outside the suit.

### VISOR/FACE SEAL

The visor on encapsulating suits is made from a rigid 2 mm impact and chemical resistant PVC. Option of two visors; CV or the larger VP1. The visor is fitted with an outer antistatic tear-off/ATEX lens. Non-encapsulating suits are fitted with an anatomically designed face seal.

### ZIPPER

Strong and durable gastight chloroprene rubber coated zipper. Closing downwards for added safety. The zipper is protected by a splash guard (flap).

**Note:** ET suits have the Trellchem® HCR zipper.

### VENTILATION

A ventilation system is included as standard. For the safety of the wearer it provides a constant level of over-pressure inside the suit. The Trellchem® regulating valve has 3 ventilation rates (2, 30 and 100 l/min) plus zero/off position and is also available in a passthrough version for use with external air supply.

### GLOVES & ATTACHMENTS

The glove assembly consists of minimum two layers:

- Inner Ansell Barrier® glove
- Flame retardant chloroprene rubber glove (NFPA) or Viton®/Butyl rubber glove (ET suits)

An outer Kevlar® glove is available for extra cut protection (required for NFPA).

The gloves are attached with the Trellchem® Bayonet glove ring system, which offers quick and simple glove exchange.

### FOOTWEAR & ATTACHMENTS

The suit is equipped with a sewn-on sock/bootie in the suit material. Alternatively the suit has attached boots.

### SEAM

Stitched with aramid thread for superior strength and durability. Taped with a rubber strip on the outside and a barrier laminate strip welded to the inside. This provides a continuous barrier layer across the seam.

**Note: NFPA certified suits are always in encapsulating design, have sewn-on socks and NFPA glove assembly.**

Trellchem® is a registered trademark owned by Trelleborg. Kevlar® is a registered trademark of E. I. du Pont de Nemours and Company; Viton® registered trademark owned by DuPont Performance Elastomers L.L.C. ©2013 Ansell Limited. All Rights Reserved.