

REBEL™ SELF RETRACTING LIFELINE (SRL)



**TOTAL
COMPLIANCE.
ABSOLUTE
CONFIDENCE.**

TRUSTED, QUALITY FALL PROTECTION



PRODUCT SHEET

DEPENDABILITY

YOU CAN RELY ON EVERY DAY

Protecta® continues to set the standard for performance and value.

The Rebel™ SRL line is built to last providing an economical fall protection solution without compromising performance or safety!



Durable

- Built to last
- Heavy-duty housing types
 - Aluminum
 - Thermoplastic
- High strength lifeline options
- Stackable

Reliable

- 420 lb. (190 kg) capacity
- 3,600 lb. (1,633 kg) gate capacity
- Side cable exit
- Top swivel

Markets Served

- Commercial Construction
- Residential Construction
- Industry & Manufacturing
- Refinery Maintenance & Construction
- And More!

	6' (1.8m)	10' (3m)	11' (3.3m)	15' (4.5m)	20' (6m)	33' (10m)	50' (15m)	66' (20m)	82' (25m)	100' (30m)
1 Swiveling Anchorage Connection	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2 420 lb. (190 kg) Capacity						✓	✓	✓	✓	✓
3 Stackable	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
4 Side Cable Exit	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
5 3/16" (5mm) Wire Rope (Galv or SS)						✓	✓	✓	✓	✓
6 High Strength Thin Webbing	✓	✓	✓	✓	✓					
7 Thermoplastic Housing						✓	✓	✓	✓	✓
8 Aluminum Housing	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
9 Carrying Handle						✓	✓	✓	✓	✓
10 Self Locking Snap Hook	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
11 3,600 lb. (1,633 kg) Rated Gate	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12 Swiveling Hook	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
13 Impact Indicator On Hook						✓	✓	✓	✓	✓

EXPLORE THE SYSTEM

Unique Packaging



2 **420 lb. (190 kg) Capacity**
Higher capacity for operator and tools

1 **Top Swivel**
Limits lifeline twisting.

3 **Stackable**
Housing design allows for stacking on work surfaces

7 **Thermoplastic Housing**
Lightweight, compact and durable

or

8 **Aluminium Housing**
Provides exceptional strength and durability

9 **Ergonomic Carrying Handle**
Built-in design makes transport, set-up and storage easy




4 **Side Cable Exit**
Enables smooth operation and reduces cable wear

Ergonomic Cable Handle
Provides added comfort and ease-of-use when making connections

1 **Top Swivel**
Limits lifeline twisting

8 **Rugged Aluminium Housing**
Provides exceptional strength and durability

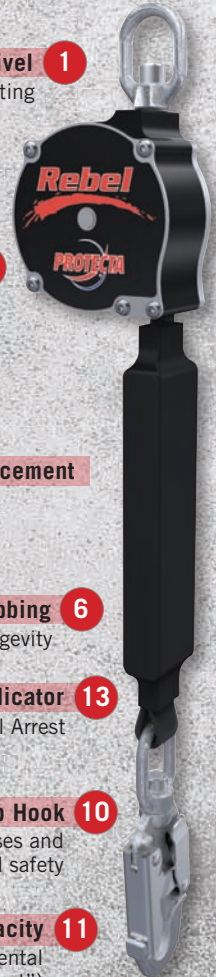

5 **Galvanized and SS Cable**
Stainless steel option for added corrosion resistance

12 **Swivel Hook**
Limits lifeline twisting

Economical Lanyard Replacement

6 **High Strength Thin Webbing**
For added durability and longevity.

13 **Impact Indicator**
Provides visual indication of Fall Arrest

13 **Impact Indicator**
Provides visual indication of Fall Arrest

10 **Self Locking Snap Hook**
Automatically closes and locks for added safety

10 **Self Locking Snap Hook**
Automatically closes and locks for added safety

11 **3,600 lb. (1,633 kg) Gate Capacity**
Reduces chance of accidental disengagement ("roll-out")

11 **3,600 lb. (1,633 kg) Gate Capacity**
Reduces chance of accidental disengagement ("roll-out")

REBEL™ ORDERING INFORMATION

		Cable/Web Length						6' (1.8m)	10' (3m)	11' (3.3m)	15' (4.5m)	20' (6m)	33' (10m)	50' (15m)	66' (20m)	82' (25m)	100' (30m)	
Certification	Lifeline Material																	
	Thermoplastic Housing																	
	Aluminum Housing																	
	Swiveling Anchorage																	
	Swiveling Hook																	
	310 lb. (140 kg) Weight Capacity																	
	420 lb. (190 kg) Weight Capacity																	
OSHA / ANSI	Galv Cable											3590500	3590550	3590590	3590630	3590670		
												3590510	3590560	3590600	3590640	3590680		
	SS Cable							3506062		AD210B	AD115B							
													3590501	3590551	3590591	3590631	3590671	
	Web												3590511	3590561	3590601	3590641	3590681	
								3101456		AD111A		AD120A						
								3101481		AD111AR		AD120AR						
								3101457		AD111B		AD120B						
	CSA	Galv Cable																
									AD115BC**					3590502	3590552	3590592	3590632	3590672
													3590512	3590562	3590602	3590642	3590682	
SS Cable							3506062C**	AD210BC**		3506050C								
													3590503	3590553	3590593	3590633	3590673	
Web													3590513	3590563	3590603	3590643	3590683	
								3101455C**	AD110AC**			AD120AC						
								3101477C**	AD110ARC**			AD120ARC						
								3101454C**	AD110BC**			AD120BC						
							3101476C**	AD110BRC**			AD120BRC							
Weight		2.6 lbs (1.2 kg)	2.8 lbs (1.3 kg)	2.8 lbs (1.3 kg)	7.9 lbs (3.6 kg)	5.1 lbs (2.3 kg)	13.5 lbs (6.1 kg)	17.3 lbs (7.8 kg)	22 lbs (10 kg)	28.6 lbs (13 kg)	29.5 lbs (13.4 kg)							
Approximate Depth		2" (5cm)	2" (5cm)	2" (5cm)	2" (5cm)	2" (5cm)	4.6" (12cm)	4.6" (12cm)	5.5" (14cm)	5.5" (14cm)	5.5" (14cm)							
Approximate Width		4" (10cm)	4" (10cm)	4" (10cm)	4" (10cm)	2" (5cm)	9.8" (25cm)	11" (28cm)	12.8" (33cm)	12.8" (33cm)	12.8" (33cm)							
Approximate Height*		19" (48cm)	19" (48cm)	19" (48cm)	20.5" (52cm)	20.5" (52cm)	22.5" (57cm)	23.8" (61cm)	25.7" (65cm)	25.7" (65cm)	25.7" (65cm)							

Standards: Meets OSHA 1926.502, OSHA 1910.66, ANSI Z359.1, ANSI Z359.12, ANSI A10.32, CSA Z259.2.2 Type II, **CSA Z259.2.2 Type I

*Anchor point to anchor point
†Web Unit

ACCESSORIES



USA	CANADA	Description
1191209	1191209C	PRO™ Line Construction Style Harness
AD001	AD001	Cab Mount Bracket w/Hardware, for Rebel™ (web)
1200101	1200101	60' (18m) PRO-Line™ Horizontal Lifeline System with two 6' (1.8m) Tie-Off Adaptors and Carrying Bag
AJ408AG	AJ408CG-6	Tie-off Adapter, 6' x 1/4" (1.8m x 6mm) Coated Galvanized Cable w/AJ520A Hook & 3" O-ring
AJ450A	AJ450C-3	Tie-off Adapter, 3' (.9m) Web
AJ450A6	AJ450C-6	Tie-off Adapter, 6' (1.8m) Web
2190053	2190053	Anchor, Concrete, Wedge
2190055	2190055	Anchor, Concrete, Bolt
AJ720A	AJ720A	Anchor, Concrete, Plate, w/D-ring & Bolts
AJ730A	AJ730A	Anchor, Roof, Steel, Reusable
AJ703A	AJ703A	Raildog™ Sliding Rail Anchor
AN112A	AN112C	Anchorage, Eyebolt, Wide "D"
2000115	AJ514A	Carabiner, Self Closing/Locking Gate

Capital Safety - USA: 800 328 6146

Canada: 800 387 7484 | Latin America: +1 651 385 4301

Asia: +65 65587758 | Germany: +49 (0)30 92 03 83 87 00

New Zealand: 0800 212 505 | Australia: 1800 245 002

Europe, Middle East, Africa: +33 (0)4 97 10 00 10

Northern Europe: +44 (0)1928 571324

www.capitalsafety.com | info@capitalsafety.com

