


SPF00-1/TPF00-1 SERIES

★★★★ 300lbs.

LOAD CAPACITY

TYPE IA
DUTY RATING

STYLE: Posting Ladder

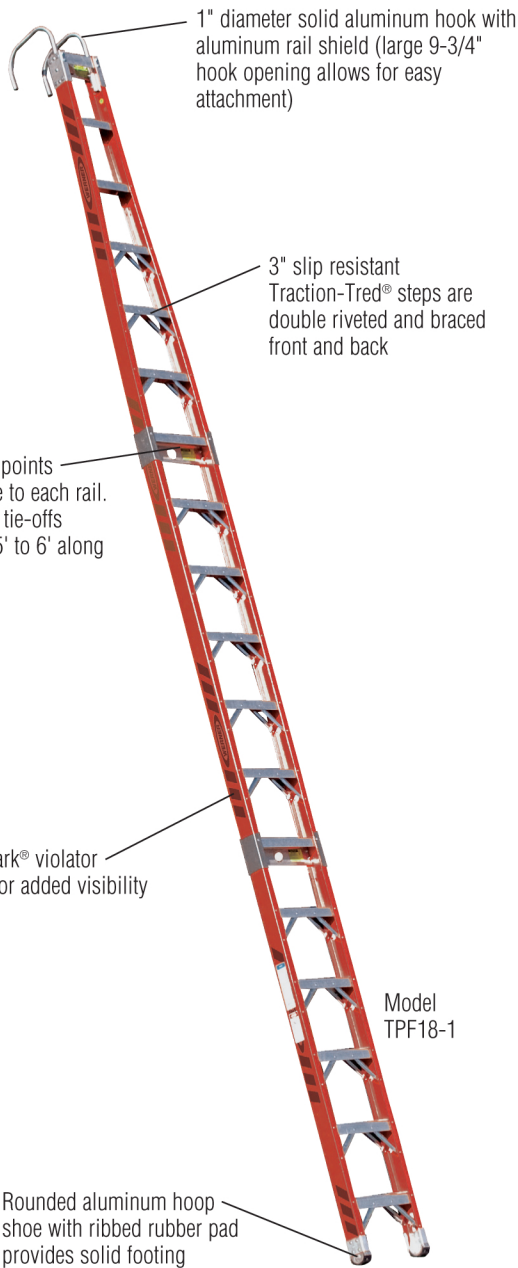

1" diameter solid aluminum hook with aluminum rail shield (large 9-3/4" hook opening allows for easy attachment)

3" slip resistant Traction-Tred® steps are double riveted and braced front and back

Center anchor points distribute force to each rail. Fall protection tie-offs located every 5' to 6' along the ladder

Glas*Mark® violator stripes for added visibility

Model TPF18-1

Rounded aluminum hoop shoe with ribbed rubber pad provides solid footing

SPECIFICATIONS

Model No.	Total Length	Length for Shipping	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
Straight Posting Ladders (not shown above)				
SPF14-1	14'	15'	6.0	38.0
SPF16-1	16'	17'	6.8	43.0
SPF18-1	18'	19'	7.6	49.0
SPF20-1	20'	21'	8.4	58.0
Tapered Posting Ladders				
TPF14-1	14'	15'	6.0	37.0
TPF16-1	16'	17'	6.8	42.0
TPF18-1	18'	19'	7.6	48.0
TPF20-1	20'	21'	8.4	57.0

DIMENSIONS

Rails:	3-5/16" wide	Steps:	2-7/8" wide
Flange:	1-3/16" wide	Base Width:	14-5/8"

S7700 SERIES

★★★ 250lbs.

LOAD CAPACITY

TYPE I
DUTY RATING

STYLE: Interchangeable Parallel Sectional Ladder



Exclusive Alflo® rung joint means Twist-Proof® performance

- Maximum number of sections to be used – 3

Slip-resistant Traction-Tred® round rungs

Sections joined by heavy duty extruded fittings and secured by a cam driven tension clamp



Mar-resistant, vinyl coated aluminum hoop end caps Model S7701

Two assembled models S7706-1

Model S7702-1 shoes

Slip-resistant shoes

SPECIFICATIONS

Model No.	Description	Top of Section	Bottom of Section	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
S7706-1	For manhole use - 6' length	12" wide	12" wide	2.1	15.5
End Caps and Shoes					
S7701	End cap (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-1	Shoe with black EPDM pad (2 required)	N/A	N/A	0.1	1.5 ea.
S7702-2	Shoe with gray EPDM pad (2 required) Buna N Pad - Oil resistant	N/A	N/A	0.1	1.5 ea.

ASSEMBLY DESCRIPTION

Max. No. of Sections	Approx. Max. Assembled Length
(3) assembled 6' sections with (1) pair of end caps and (1) pair of shoes	19'

DIMENSIONS

Rails:	3-5/16" wide
Flange:	1-3/16" wide
Rungs:	1-1/4" diameter

