

TrellTent VIII

Features


- Connecting ability
- Tightening belts
- Carrying bag
- Heater/airconditioner hook-up sleeves
- Provision for aerial identification
- Doors facilitate optimum modular configurations
- Fixing points for lighting elements

Possible extras

- 200/300 bar air bottle interface
- 220/110/24 V electric deflator/inflator
- 600 L. water belts for anchoring
- Windows
- Lighting
- Diesel heating or Airconditioning
- Thermal insulation innerliner
- TrellTent connection unit
- Integrated shower system
- Banner with text/graphics

Fields of use

- Shelter
- Field hospital
- Decontamination
- Rescue purposes
- Fire fighting
- Military operations

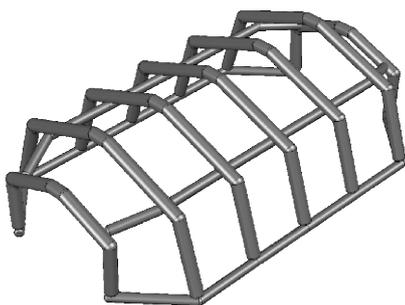

Features

- Inflated in less than two minutes.
- Lightweight: two-man handling.
- Built-in safety valves.
- No coloured light interference.
- Shelters can be connected to all other models.
- Stays up for several days without reinflation.
- Airframe design allows automatic deployment.
- Two-chamber airframe for enhanced stability

Technical Specifications

Type:	TrellTent VIII
Dimensions:	1000 x 650 x 315 cm
Dimensions packed:	130 x 80 x 90 cm
Area:	65 m ²
Weight:	120 kg
Material:	for maximum durability, the shelter is made entirely out of high-quality materials.