


TrellTent XI

Features

- Connecting ability
- Tightening belts
- Carrying bag
- Heater/airconditioner hook-up sleeves
- Provision for aerial identification
- Doors facilitate optimum modular configurations
- Fixing points for lighting elements

Possible extras

- 200/300 bar air bottle interface
- 220/110/24 V electric deflator/inflator
- 600 L. water belts for anchoring
- Unique water-belt anchoring system
- Windows
- Lighting
- Diesel heating or Airconditioning
- Thermal insulation innerliner
- TrellTent connection unit
- Integrated shower system

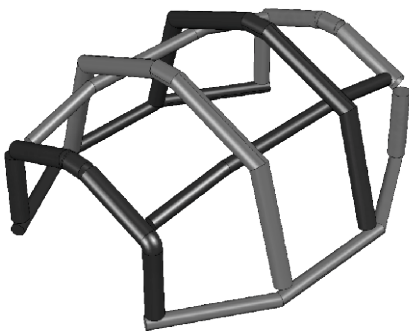

Fields of use

- Shelter
- Field hospital
- Decontamination
- Rescue purposes
- Fire fighting
- Military operations



Features

- Inflated in less than three minutes.
- Lightweight: two-man handling.
- Built-in safety valves.
- No coloured light interference.
- Shelters can be connected to all other models.
- Stays up for several days without reinflation.
- Airframe design allows automatic deployment.
- Unique water-bag anchoring system.

Technical Specifications

Type:	TrellTent XI
Dimensions:	640 x 540 x 300 cm
Shelter packed app.:	100 x 55 x 50 cm
Weight:	ca. 85 kg
Area:	30 m ²
Material:	for maximum durability, the shelter is made entirely out of high-quality materials.