



Range Overview
MICROCHEM® 4000

MICROCHEM®
4000


MICROCHEM[®] 4000

MICROCHEM[®]
4000



MICROCHEM[®] 4000 is designed to provide an exceptional barrier against organic and inorganic chemicals and biological agents.

A unique multi-layer barrier fabric renowned for its lightweight, yet robust textile feel and exceptional barrier to organic & inorganic chemicals.

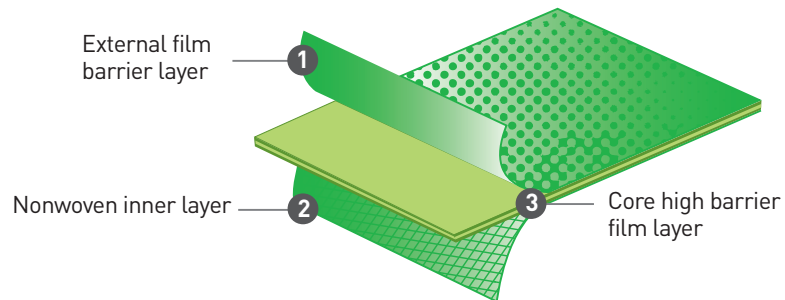

Applications

- Chemical handling / transportation
- Oil-based mud protection
- Hazardous waste remediation
- Sewage purification installations
- Industrial / tank cleaning
- HAZMAT Emergency Response (i.e. Level B)
- Pharmaceutical
- Mining
- Agriculture

Features & Benefits

Protection - Permeation tested against over 180 chemicals, including chemical warfare agents

Comfort - Textile like inner improves wearer acceptance

Anti-static - Tested according to EN 1149-5

Designed to protect - Typical coverall features include dual zip systems and double cuffs

Protection Levels & Additional Properties



TYPE 3-B



TYPE 4-B



TYPE 5-B



EN 14126




EN 1073-2




EN 1149-5

Ultrasonically Welded & Taped Seams

A feature throughout the MICROCHEM[®] 4000 range, this seam technology is our highest barrier to liquids and particulates.



Innovative Design Features



Double zip system helps ensure a liquid tight seal without the need for additional taping



Double cuff design to enable a spray-tight connection with chemical protective gauntlets (additional taping or Glove Link is required)

Specialist Approvals



Biological Agents
EN 14126:2003



Suitable for Ex-Zones

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hesse · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD[®]
High Performance Protection in Comfort

MICROCHEM[®] 4000 Coveralls


MICROCHEM[®]
4000

Model 103

Suit Features

- Collar
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated outer cuffs, waist and ankles

Sizes: S-5XL
Colour: Green




Model 111

Suit Features

- 2-piece hood
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated hood, outer cuffs, waist and ankles

Sizes: S-5XL
Colour: Green



Model 121

Suit Features

- 2-piece hood
- Double zip closure
- Elasticated hood, waist and ankles
- Attached Ansell Barrier Gloves

Sizes: S-5XL
Colour: Green



Model 122

Suit Features

- 2-piece hood
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated hood, outer cuffs, waist and boot overflaps
- Integrated socks with boot overflap

Sizes: S-5XL
Colour: Green




Modello 125

Suit Features

- 2-piece hood
- Double zip closure
- Elasticated hood, waist and boot overflaps
- Integrated socks with boot overflap
- Attached Ansell Barrier Gloves

Sizes: S-5XL **Colour:** Green



Model 162

Suit Features

- Pass-thru device for use with fall arrest equipment
- 2-piece hood
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated hood, outer cuffs, waist and ankles

Sizes: S-5XL **Colour:** Green



MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD[®]
High Performance Protection in Comfort

MICROCHEM® 4000 APOLLO

MICROCHEM®
4000
APOLLO



Trusted by fire and rescue crews around the world

Developed with the UK Fire & Rescue services MICROCHEM® 4000 APOLLO is a fully encapsulated liquid tight chemical suit designed for use in conjunction with self contained breathing apparatus (SCBA)

MICROCHEM® 4000 APOLLO

Protection Levels & Additional Properties



TYPE 3-B



TYPE 4-B



EN 14126

Applications

- Chemicals
- Oil and petrochemicals
- Pharmaceutical
- Agriculture
- Sewage purification installations
- Industrial and tank cleaning
- Emergency Services (HAZMAT, CBRN)


...may also be suitable for use in Level B applications

(according to US Environmental Protection Agency (EPA) & NFPA guidelines).

Contact the Microgard tech team for full details or email technical@microgard.com

Ultrasonically Welded & Taped Seams


A feature throughout the MICROCHEM® 4000 range, this seam technology is our highest barrier to liquid and particulates.



Model 126


Suit Features

- Rear entry double zip system
- Rear mounted BA (breathing apparatus) pouch – universal fit with most BA
- Attached socks with boot overflap
- Attached Ansell Barrier® Gloves
- Exhalation valves
- Clear face visor
- Ultrasonically welded and taped seams
- Bat-wing design enables air gauge checking within the suit
- Chest strap for DSU (Distress Signal Unit)
- Adjustable internal support braces



Sizes: M-2XL

Colour: Green



SCBA rear pouch



Rear mounted BA pouch



Decontamination process example

Specialist Approvals



Biological Agents
EN 14126:2003



Suitable for Ex-Zones

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hesse · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD®
High Performance Protection in Comfort

MICROCHEM® 4000 Model 151

MICROCHEM®
4000

Developed for first responders and the emergency services

Rear entry suit, with neoprene rubber face seal for a close fit to full face respirators. Ideal for use in hazardous areas where protection against concentrated chemicals and biological agents is required.

MICROCHEM® 4000 Model 151

Protection Levels & Additional Properties



TYPE 3-B



TYPE 4-B



TYPE 5-B



EN 1073-2



EN 1149-5




EN 14126



Ultrasonically Welded & Taped Seams

A feature throughout the MICROCHEM® 4000 range, this seam technology is our highest barrier to liquid and particulates.



Model 151 - G00 & G02

Suit Features


- Neoprene rubber face seal
- Rear horizontal zip entry
- Attached socks with boot overflap
- Ultrasonically welded and taped seams

151-G02

- Includes attached Ansell Barrier Gloves, with oversleeves and finger loops

Sizes: S-5XL

Colour: Green



Model 151 also available in...

MICROCHEM®
5000



Socks with boot overflap



Rear entry double zip system



Neoprene rubber face seal

Applications

- Chemicals
- Oil and petrochemicals
- Pharmaceutical
- Agriculture
- Sewage purification installations
- Industrial and tank cleaning
- Emergency Services (HAZMAT, CBRN)

Specialist Approvals



Biological Agents
EN 14126:2003



Suitable for Ex-Zones

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD®
High Performance Protection in Comfort

MICROCHEM® 4000 Accessories

MICROCHEM®
4000

MICROCHEM® 4000 Accessories

Model 212



Apron

- Tie fastening to waist
- 100cm long tie fastening

Size: One Size
Colour: Green

Model 301




Trousers

- Elastication to waist and ankles
- No pockets
- Welded and taped seams

Sizes: S-2XL
Colour: Green

Model 516



Cape Hood with visor

- Hood with visor and 3 inch velcro body panel
- Welded & taped seams

Size: One Size
Colour: Green

Model 215



Apron with Sleeves

- Velcro fastening to neck
- Tie fastening at the waist
- Double cuff with knitted inner cuff
- Welded and taped seams

Sizes: S-5XL
Colour: Green

Model 406



Overboots

- Elastic to top of boot
- Tie fastening
- Welded seams

Size: One Size (fits size 42-46)
Colour: Green

Model 600



Oversleeves

- Elasticated at both ends
- Welded seams

Size: One Size
Colour: Green

Model 230



Jacket

- 2 piece hood
- Double zip closure
- Elasticated hood, wrists and hem
- Welded and taped seams

Sizes: S-5XL
Colour: Green

Model 507



Cape Hood

- Balaclava style cape hood covering part of shoulders
- Velcro fastening to front
- Welded seams

Size: One Size
Colour: Green

For more information on our range of accessories, or if you can't see the accessory you are looking for, please contact Microgard Limited customer services Tel: **+44 (0) 1482 625444**, email sales@microgard.com or visit www.microgard.com

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel **+44 (0) 1482 625444** · Fax **+44 (0) 1482 630400**

Email sales@microgard.com · www.microgard.com

MICROCHEM® 4000 Technical Data

MICROCHEM® 4000 is extensively tested in accordance with statutory requirements, including physical performance attributes and barrier to hazardous substances. The following tables outline the results obtained in independent laboratories according to European test methods.

Test Method	Result	EN Class (EN 14325)
EN 530 Abrasion	>2,000 cycles	6 of 6
EN ISO 7854 Flex Cracking	>40,000 cycles	5 of 6
EN ISO 9073-4 Tear Resistance (Machine Direction)	>60N	3 of 6
EN ISO 9073-4 Tear Resistance (Cross Direction)	>40N	
EN ISO 13934-1 Tensile Strength (Machine Direction)	>100N	2 of 6
EN ISO 13934-1 Tensile Strength (Cross Direction)	>60N	
EN 863 Puncture Resistance	>10N	2 of 6
EN ISO 13938-1 Burst Resistance	>80kPa	2 of 6
EN 13274-4 Resistance to ignition	Pass	-
EN 13274-4 Resistance to flame	Pass	1 of 3
EN 1149-5 Electrostatic Properties (Surface Resistance)	<2.5 x 10 ⁹	-
ISO 13935-2 Seam Strength	>125 N	4 of 6

MICROCHEM® 4000 has been tested against over 180 chemicals.

EN ISO 6529 Chemical Permeation Test Results			
Chemical Name	CAS Number	BT at 1.0µg/cm ² /min	EN Class (EN 14325)
Acetone	67-64-1	>480	6 of 6
Acetonitrile	75-05-8	>480	6 of 6
Chlorine Gas (>99.8 wt%)	7782-50-5	>480	6 of 6
Chromium Trioxide (50 wt%)	1333-82-0	>480	6 of 6
Ethyl Acetate	141-78-6	>480	6 of 6
Heptane-n (99.8%)	142-82-5	>480	6 of 6
Hydrofluoric Acid (71-75 wt%)	7664-39-3	>480	6 of 6
Hydrogen Chloride Gas (>99.0 wt%)	7647-01-0	>480	6 of 6
Hydrogen Peroxide (35%)	7722-84-1	>480	6 of 6
Methanol	67-56-1	>480	6 of 6
Methyl Ethyl Ketone	78-93-3	>480	6 of 6
Nitric Acid conc (70%)	7697-37-2	>480	6 of 6
Sodium Hydroxide (40 wt%)	1310-73-2	>480	6 of 6
Sulphuric Acid (96%)	7664-93-9	>480	6 of 6
Toluene	108-88-3	>480	6 of 6

TNO Protocols – Resistance to permeation of Chemical Warfare Agents			
Chemical	Detection Limit	Temperature (°C)	Breakthrough Time (hh:mm)
Mustard (HD)	0.1µg/cm ² (pinpoint BT) or 4µg/cm ² (continuous and homogenous BT)	37	>24:00
Lewisite (L)	Approx. 0.5 µg/cm ²	37	>05:00 <06:00
Sarin (GB)	Approx. 0.05 µg/cm ²	37	>24:00
VX	Approx. 0.05 µg/cm ²	37	>24:00

MICROCHEM® 4000 when tested in accordance with EN 14126: 2003 demonstrates an excellent barrier to infective agents.

EN14126 Barrier to Infective Agents	Result	EN Class
ISO 16603 Resistance to penetration by blood/fluids under pressure	Pass to 20kPa	Class 6 of 6
ISO 16604 Resistance to penetration by blood borne pathogens	Pass to 20kPa	Class 6 of 6
EN ISO 22610 Resistance to wet bacterial penetration (mechanical contact)	No penetration (up to 75 mins)	Class 6 of 6
ISO/DIS 22611 Resistance to biologically contaminated aerosols	No penetration	Class 3 of 3
ISO 22612 Resistance to dry microbial penetration	No penetration	Class 3 of 3

MICROCHEM® 4000 products have been extensively tested according to European and International requirements, including ASTM, for both physical and barrier performance. More details can be found on our website www.microgard.com

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com