



Range Overview
MICROCHEM® 5000

MICROCHEM®
5000


MICROCHEM® 5000

MICROCHEM®
5000



MICROCHEM® 5000 reaches new levels in chemical protection and has been engineered to protect. The highly visible multi-layer fabric is strong, durable and suitable for workers in extremely hazardous areas, including HAZMAT response teams.

This highly visible innovative material is strong, durable and suitable for workers in extremely hazardous areas, including HAZMAT response teams.

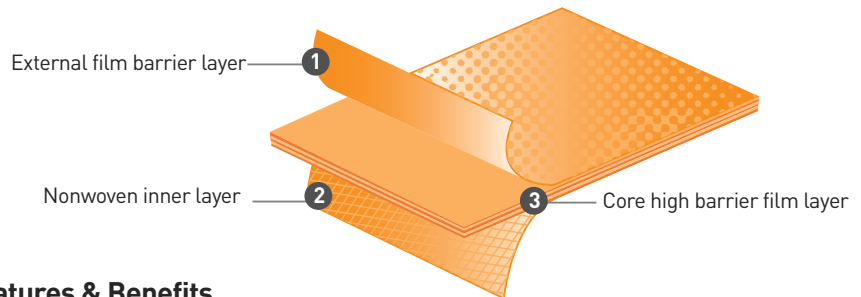

Features & Benefits

Performance - Barrier to numerous organic and inorganic chemicals and biological hazards

Comfort - Multi-layer material which is lightweight, yet strong and durable

Highly visible - Bright orange colour for improved worker safety

Protection - >480 minutes breakthrough time against 14 of 15 chemicals listed in EN ISO 6529

Anti-static - Tested according to EN 1149-5

Designed to protect - Innovative design features include liquid-tight dual zip designs without the need for additional taping

Applications

- Chemicals
- Oil and petrochemicals
- Pharmaceuticals
- Mining
- Agriculture
- First response
- Fire service
- Industrial and tank cleaning
- Sewage purification installations

Protection Levels & Additional Properties



TYPE 3-B



TYPE 4-B



TYPE 5-B



EN 1073-2




EN 1149-5




EN 14126

Ultrasonically Welded & Taped Seams

A feature throughout the MICROCHEM® 5000 range, this seam technology is our highest barrier to liquids and particulates.



Innovative Design Features



Double zip system helps ensure a liquid tight seal without the need for additional taping



Double cuff design to enable a spray-tight connection with chemical protective gauntlets (additional taping or Glove Link is required)

Specialist Approvals



Biological Agents
EN 14126:2003



Suitable for Ex-Zones

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD®
High Performance Protection in Comfort

MICROCHEM® 5000


MICROCHEM®
5000

Model 103

Suit Features

- Collar
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated outer cuffs, waist and ankles

Sizes: S-5XL
Colour: Orange

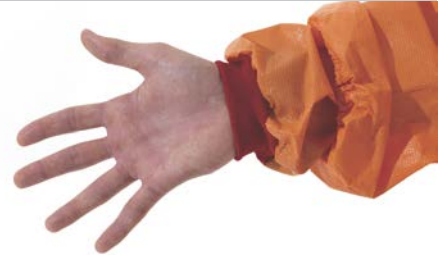

Model 111

Suit Features

- 2 piece hood
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated hood, outer cuffs, waist and ankles

Sizes: S-5XL
Colour: Orange




Model 121 - G02

Suit Features

- 2 piece hood
- Double zip closure
- Elasticated hood, waist and ankles
- Attached Ansell Barrier Gloves

Sizes: S-5XL
Colour: Orange




Model 122

Suit Features

- 2 piece hood
- Double zip closure
- Double cuffs with knitted inner cuff
- Elasticated hood, outer cuffs, waist and boot overflaps
- Integrated socks with boot overflap

Sizes: S-5XL
Colour: Orange




Model 125 - G02

Suit Features

- 2 piece hood
- Double zip closure
- Elasticated hood, waist and boot overflaps
- Integrated socks with boot overflaps
- Attached Ansell Barrier Gloves

Sizes: S-5XL
Colour: Orange



MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD®
High Performance Protection in Comfort


MICROCHEM® 5000 APOLLO

MICROCHEM®
5000
APOLLO



Developed for fire and rescue crews around the world

MICROCHEM® 5000 APOLLO is a fully encapsulated liquid tight chemical suit designed for use in conjunction with self contained breathing apparatus (SCBA)

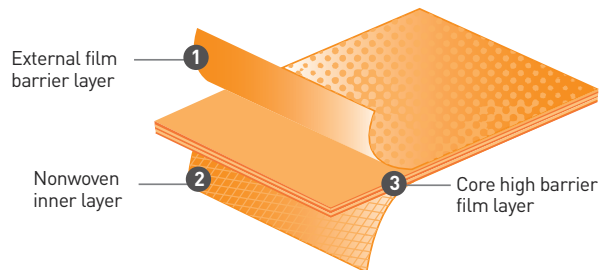

This highly visible innovative material is strong, durable and suitable for workers in extremely hazardous areas, including HAZMAT response teams.

Protection Levels & Additional Properties



TYPE 3-B



TYPE 4-B



EN 14126



EN 1149-5


Applications

- Chemicals
- Oil and petrochemicals
- Pharmaceutical
- Industrial and tank cleaning
- Emergency Services (HAZMAT, CBRN)
- May also be suitable for Level B HAZMAT response in accordance with US Environmental Protection Agency (EPA) & NFPA guidelines)

Contact the Microgard tech team for full details or email technical@microgard.com

Ultrasonically Welded & Taped Seams


A feature throughout the MICROCHEM® 5000 range, this seam technology is our highest barrier to liquids and particulates.



Model 186

Suit Features

- Side entry Double Zip flap
- Expanded back for internal wearing of self-contained breathing apparatus
- Rear positioned exhalation valves
- Attached socks with static dissipative sole & leg over flap
- Attached Ansell Barrier™ gloves with sleeve over flap.
- Semi-rigid multi-layer visor
- Ultrasonically welded and taped seams
- Bat-wing design enables air gauge checking within the suit



Attached Ansell Barrier™ gloves with sleeve over flap.



Semi-rigid multi-layer visor

Sizes: M-3XL
Colour: Orange

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com


MICROGARD®
High Performance Protection in Comfort

MICROCHEM® 5000 Technical Data

MICROCHEM® 5000 is extensively tested in accordance with statutory requirements, including physical performance attributes and barrier to hazardous substances. The following tables outline the results obtained in independent laboratories according to European test methods.

Test Method	Result	EN Class (EN 14325)
EN 530 Abrasion	>2000 Cycles	6 of 6
EN ISO 7854 Flex Cracking	>5000 Cycles	3 of 6
EN ISO 9073-4 Tear Resistance (Machine Direction)	>60N	4 of 6
EN ISO 9073-4 Tear Resistance (Cross Direction)	>60N	
EN ISO 13934-1 Tensile Strength (Machine Direction)	>100N	3 of 6
EN ISO 13934-1 Tensile Strength (Cross Direction)	>100N	
EN 863 Puncture Resistance	>10N	2 of 6
EN ISO 13938-1 Burst Resistance	>80kPa	2 of 6
EN 13274-4 Resistance to ignition	Pass	-
EN 13274-4 Resistance to Flame	Pass	2 of 3
EN 1149-5: 2008 Electrostatic Properties (Surface Resistance)	<2.5 x 10 ⁹	-
ISO 13935-2 Seam Strength	241.8N	4 of 6

MICROCHEM® 5000 has been tested against numerous chemicals.

EN ISO 6529 Chemical Permeation Test Results			
Chemical Name	CAS Number	BT at 1.0µg/cm ² /min	EN Class (EN 14325)
Acetone	67-64-1	>480	6 of 6
Acetonitrile	75-05-8	>480	6 of 6
Ammonia Gas, 1 atmos.	7664-41-7	>480	6 of 6
Carbon Disulphide	75-15-0	>480	6 of 6
Chlorine (>99.8wt%) Gas, 1 atmos.	7782-50-5	>480	6 of 6
Diethylamine	109-89-7	>480	6 of 6
Ethyl Acetate	141-78-6	>480	6 of 6
Hexane-n (99.8 wt%)	110-54-3	>480	6 of 6
Hydrogen Chloride (>99.0 wt%) Gas, 1 atmos	7647-01-0	>480	6 of 6
Methanol (>99.5 wt%)	67-56-1	>480	6 of 6
Sodium Hydroxide (aq, 50wt%)	1310-73-2	>480	6 of 6
Sulphuric Acid (96 wt%)	7664-93-9	>480	6 of 6
Tetrahydrofuran	109-99-9	>480	6 of 6
Toluene (99.99 wt%)	108-88-3	>480	6 of 6

TNO Protocols – Resistance to permeation of Chemical Warfare Agents			
Chemical	Detection Limit	Temperature (°C)	Breakthrough Time (hh:mm)
Mustard (HD)	Approx. 0.5 µg/cm ²	37	>17:40
Lewisite (L)	Approx. 0.5 µg/cm ²	37	>06:30 <09:30
Sarin (GB)	Approx. 0.05 µg/cm ²	37	>24:00
VX	Approx. 0.05 µg/cm ²	37	>24:00

MICROCHEM® 5000 when tested in accordance with EN 14126:2003 demonstrates an excellent barrier to infective agents.

EN14126 Barrier to Infective Agents	Result	EN Class
ISO 16603 Resistance to penetration by blood/fluids under pressure	Pass to 20kPa	Class 6 of 6
ISO 16604 Resistance to penetration by blood borne pathogens	Pass to 20kPa	Class 6 of 6
EN ISO 22610 Resistance to wet bacterial penetration (mechanical contact)	No penetration (up to 75 mins)	Class 6 of 6
ISO/DIS 22611 Resistance to biologically contaminated aerosols	No penetration	Class 3 of 3
ISO 22612 Resistance to dry microbial penetration	No penetration	Class 3 of 3

MICROCHEM® 5000 products have been extensively tested according to European and International requirements, including ASTM, for both physical and barrier performance. More details can be found on our website www.microgard.com

MICROGARD Limited

9 Saltmarsh Court · Priory Park · Hessle · Kingston upon Hull · UK · HU4 7DZ

Tel +44 (0) 1482 625444 · Fax +44 (0) 1482 630400

Email sales@microgard.com · www.microgard.com