



Ultra Sidewinder


Protects Cords & Cables and Avoids Dangerous Tripping Hazards

Articulating Pratt pieces offer exclusive flexible design - curves, corners and s-curves are easily made while maintaining a completely flat profile.

Modular design makes it easy to reconfigure and replace targeted segments, even while the cable remains connected.

Simple installation - no tools required.

Fully customisable length.

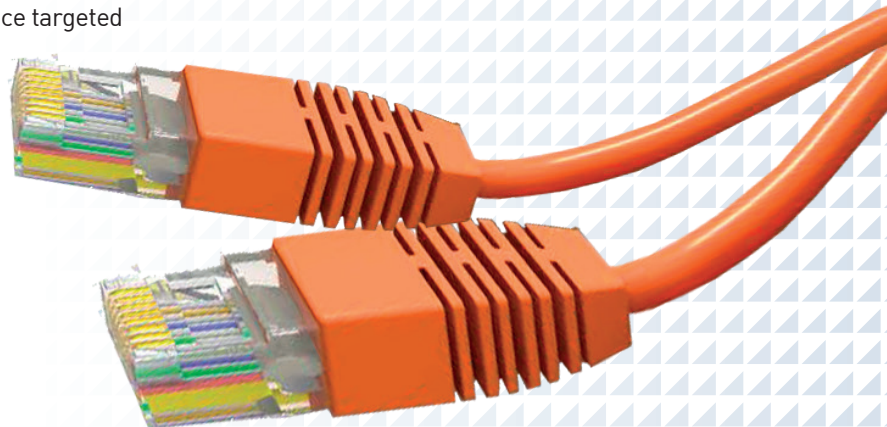

SMALL




Coil for storage or easy portability and transport.



BACK

- 1 Extension Cord
3/8" (9.5 mm)

SMALL	
Load Capacity	140.6 kg/cm ²
Load Capacity per axle	14 515 kg
3-FOOT SYSTEM WITH END CAPS	1067 mm x 76 mm x 19 mm
Weight	0.7 kg
Internal Channel Opening	19 mm x 9.5 mm

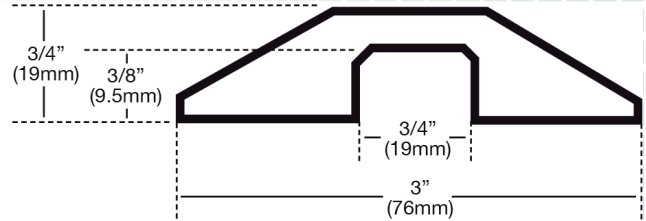

MEDIUM




BACK

- 18 Extension Cords
3/8" (9.5 mm)
- or
- 4 Air Hoses
3/4" (19 mm)
- or
- 3 Garden Hoses
5/8" (16 mm)

MEDIUM	
Load Capacity	18.3kg / cm ²
Load Capacity per axle	6123 kg
3-FOOT SYSTEM	1067 mm x 248 mm x 35 mm
Weight	2.7 kg
Internal Channel Opening	76 mm x 19 mm

*6 tonne load rating

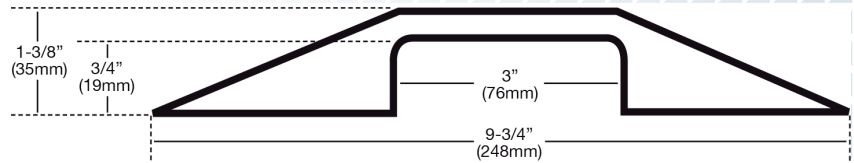

LARGE



BACK

- 32 Extension Cords
3/8" (9.5 mm)
- or
- 8 Air Hoses
3/4" (19 mm)
- or
- 3 Garden Hoses
5/8" (16 mm)
- or
- MULT. Large Industrial Cables
5/8" - 1-1/2"
(16 mm - 38mm)

LARGE	
Load Capacity	18.3kg / cm ²
Load Capacity per axle	6123 kg
3-FOOT SYSTEM	1067 mm x 346 mm x 54 mm
Weight	6.0 kg
Internal Channel Opening	76 mm x 38 mm

*6 tonne load rating

